

440.27SLS | 440.SLS - Metric combination wrenches





Standards:

NF ISO 691, NF ISO 7738, NF ISO 3318, NF ISO 1711-1, E74-306, ISO 691, ISO 7738, ISO 3318, ISO 1711-1, DIN ISO 691, DIN 1711-1, DIN 3113, ASME B107.100

Description:

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "sliding" cable solution, selected and tested by FACOM, maintains user ergonomics (8 - 30 mm wrenches).
- Standard wrench for all current applications.
- High mechanical strength combined with compact size meeting aeronautical standards.
- Ring head: - Ring open end (size E) designed for better access to series or embedded screws. - OGV® profile with 12-point ring for powerful tightening while protecting the nut. - Ring head angled at 15°.
- Open end head: - Open end angled at 15°. - Open end head-handle geometry optimised for increased access.
- Metric sizes: 6 to 34 mm.
- Presentation: satin chrome finish.

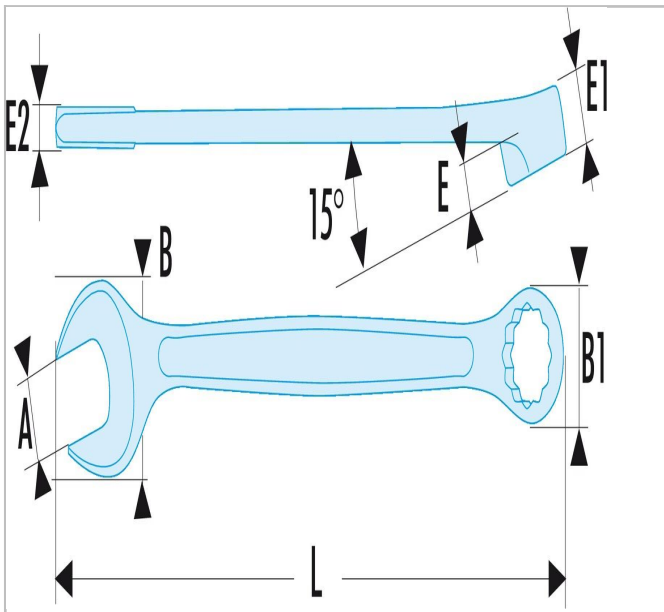

	440.27SLS
A [mm]	27.0
A [in]	
Length L [mm]	295.0
Thickness E [mm]	8.9
Thickness E1 [mm]	15.6
Thickness E2 [mm]	10.4
Head Width B [mm]	58.0
Head Width B1 [mm]	39,2
Weight [Kg]	0,4