

AN3.5X100SLS | AN-ANF.SLS - PROTWIST® screwdrivers for slotted head screws - milled blades





Standards:

NF ISO 2380-1, NF ISO 2380-2,
ISO 2380-1, ISO 2380-2, DIN ISO
2380-1, DIN ISO 2380-2, ASME
B107.600

Description:

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "rotating" cable solution, selected and tested by FACOM, maintains user ergonomics.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- Finish: black tipped mat chromed blade."

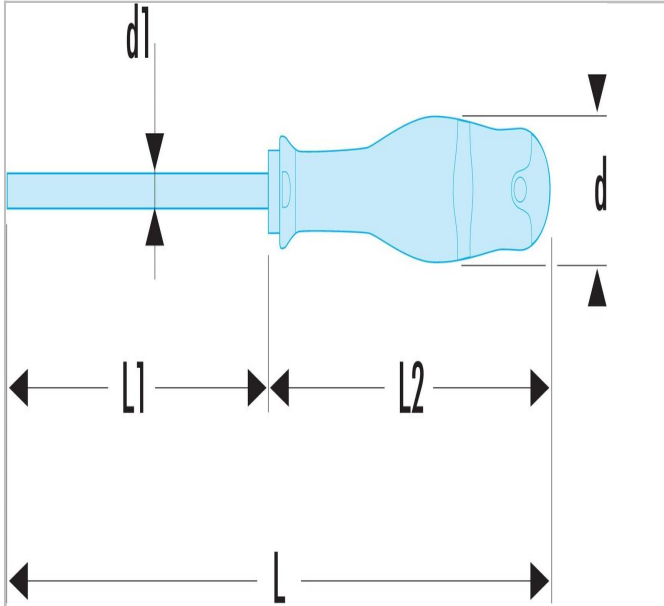

	AN3.5X100SLS
A [mm]	3.5
A [in]	
Diameter [mm]	19
Diameter D1 [mm]	3.5
Length L1 [mm]	100.0
Length L [mm]	203.0
Length L2 [mm]	94
Weight [Kg]	0.03
Thickness E [mm]	0.4