



U.53KL0 | U.53KL - Non-tapped beams



Description:

- Non tapped beams allow to use clamps U.49P1 to U.49P9 to extract bearings by inside grip.
- U.53KL0: for clamps U.49P1 to U.49P4.
- U.53KL2: for clamps U.49P5 to U.49P9 with adaptor tip U.49BR1.

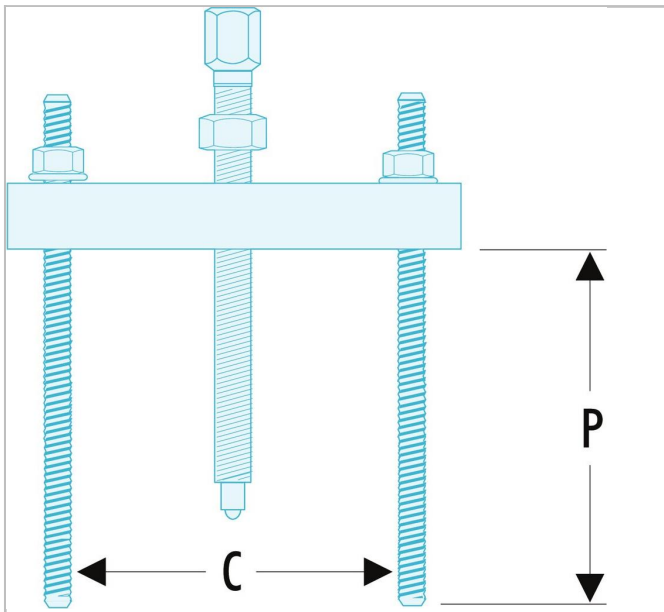

	U.53KLO
Depth [mm]	125.0
Depth Maxi [mm]	125.0
Diameter [mm]	M8
Diameter D1 [mm]	6.0
Length L [mm]	110.0
Length L1 [mm]	155.0
Length L2 [mm]	20.0
Length L3 [mm]	20.0
C Mini - Maxi [mm]	25 - 100
Hex Size [mm]	6.0
Screw Size ["]	U.53KLO-02
Tonnes ["]	1.0
t ["]	10.0
Weight [Kg]	0.4