
## 440.9 | 440 - Metric combination wrenches

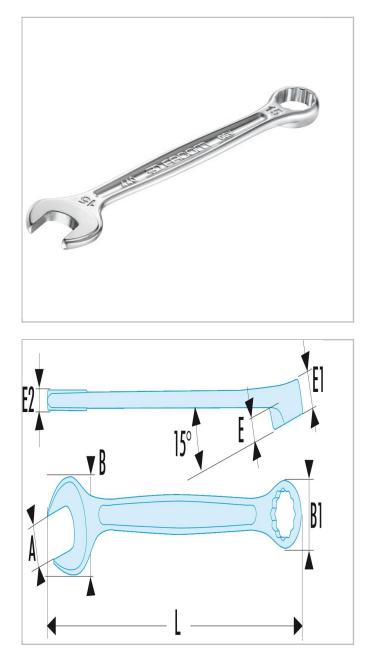

## **Standards:**

NF ISO 691, NF ISO 7738, NF ISO 3318, NF ISO 1711-1, E74-306, ISO 691, ISO 7738, ISO 3318, ISO 1711-1, DIN ISO 691, DIN 1711-1, DIN 3113, ASME B107.100

## **Description:**

• Standard wrench for all common applications.

• High mechanical performance combined with compact design complying with aeronautical standards.

• Ring head: - Ring clearance (E dimension) designed for better access to serial-mounted or embedded screws.

- OGV® profile 12-point ring for powerful tightening while protecting the nut. Suffix H = 6 sided ring. - Ring head with 15° angle.

• Open end head: - Open end with 15° angle. - Open end head-handle geometry optimized for increased accessibility.

- Metric dimensions: 4 to 41 mm.
- Satin chrome finish.

|                    | 440.9 |
|--------------------|-------|
| A [mm]             | 9.0   |
| Length L [mm]      | 138.0 |
| Thickness E [mm]   | 3.9   |
| Thickness E1 [mm]  | 7.1   |
| Thickness E2 [mm]  | 4.7   |
| Head Width B [mm]  | 21.2  |
| Head Width B1 [mm] | 14.2  |
| Weight [Kg]        | 0.035 |