

113A.12T | 113A.T - Phosphated adjustable wrenches





Standards:

NF ISO 6787, ISO 6787, DIN 3117, ASME B107.100

Description:

- Good access to the button = easy setting.
- Non-protruding moving jaw at maximum capacity.
- Pre-adjustment of jaw opening thanks to millimetric gradation.
- Left-hand button rotation.
- Range from 4" to 24".
- Presentation: phosphated body and "fine ground" head faces.

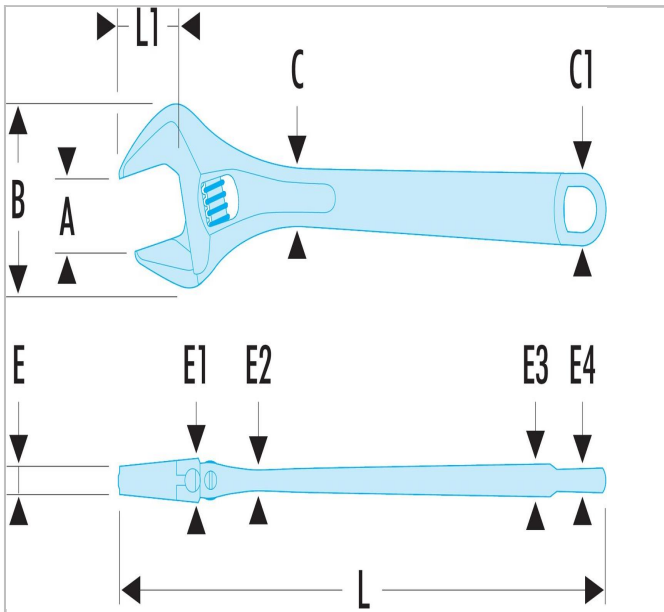

	113A.12T
A [mm]	34.0
Length L [mm]	306.0
Length L1 [mm]	34.0
Thickness E [mm]	10.0
Thickness E1 [mm]	18.0
Thickness E2 [mm]	10.2
Thickness E3 [mm]	13.0
Thickness E4 [mm]	10.0
Head Height C [mm]	25.0
Head Height C1 [mm]	31.0
Head Width B [mm]	80.0
Weight [Kg]	0.7