



229A.ST3 | 229A - Stepped bits



Description:

- For cylindrical high accuracy drilling in all materials.
- HSS steel.
- Cylindrical shank with 3 flats for proper drive, avoiding micro locking.
- Laser marking of different diameters in a groove.

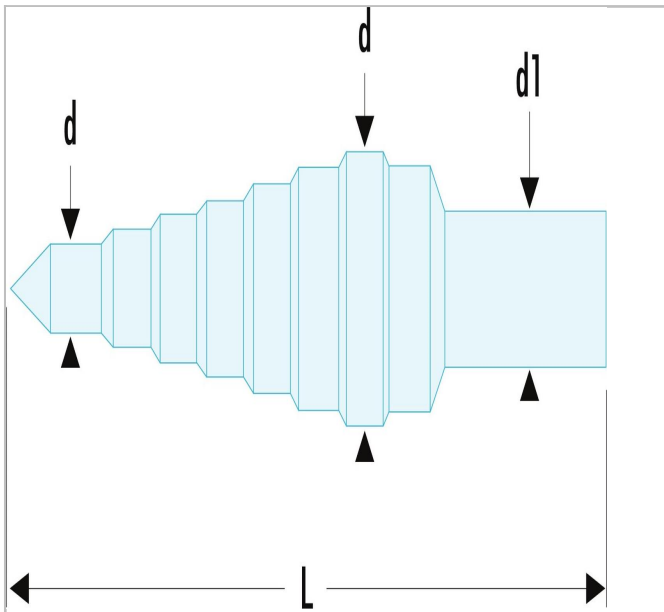

	229A.ST3
Diameter D Mini - Maxi ["]	6 - 9 - 13 - 16 - 19 - 21 - 23 - 26 - 29 - 32 - 35 - 38
Diameter D1 [mm]	10.0
Length L [mm]	100.0
Weight [g]	320.0