



## 229A.ST2 | 229A - Stepped bits



### Description:

- For cylindrical high accuracy drilling in all materials.
- HSS steel.
- Cylindrical shank with 3 flats for proper drive, avoiding micro locking.
- Laser marking of different diameters in a groove.

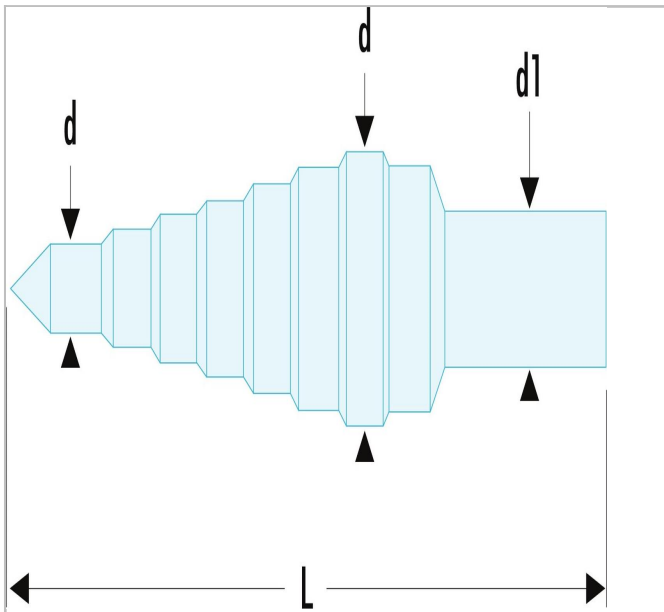

	<b>229A.ST2</b>
Diameter D Mini - Maxi ["]	4 - 6 - 9 - 12 - 15 - 18 - 21 - 24 - 27 - 30 - 33 - 36 - 39
Diameter D1 [mm]	10.0
Length L [mm]	107.0
Weight [g]	315.0