


## 678014 | PG staged drill bit



### Description:

- For cylindrical high accuracy drilling in all diameters.
- Does not require a tapping hole.
- Cylindrical shank with 3 flats for proper drive, avoiding micro locking.
- Marking of different diameters.
- 678014: Special PG cable gland.
- Panel drilling capacity up to 4 mm thickness.
- Shank diameter 10 mm.

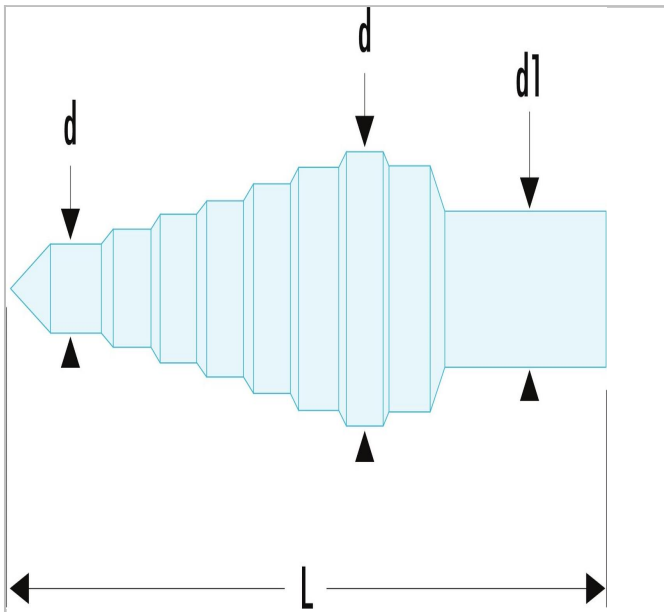

	<b>678014</b>
Length L [mm]	100
Diameter D1 [mm]	10